



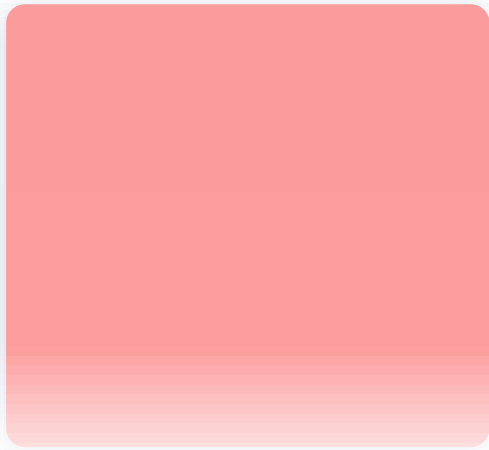

MeiG Smart SLM770A

LTE Cat.4 LCC

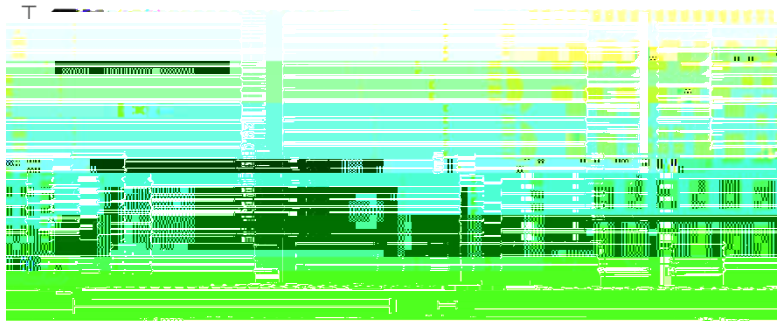

LCC+LGA (144pin)

32.0 × 29.0 × 2.4mm

<6g



LTE-FDD (Cat.4): Max 150Mbps(DL)/50Mbps(UL)

LTE-TDD (Cat.4): Max 130Mbps(DL)/35Mbps(UL)

WCDMA: Max 384kbps(DL)/384kbps(UL)

EDGE: Max 236.8kbps(DL)/236.8kbps(UL)

GPRS: Max 85.6kbps(DL)/85.6kbps(UL)

-40 ° C ~ +85 ° C -40 ~ -



CCC/CTA/SRRC/CE/RCM



&



Window , Linux 2.6 , Android 4.0

工 — 工

USB/FOTA



PPP/ECM/TCP/UDP/DTLS/HTTP(S)/FTP(S)/MQTT(S)



USB2.0 1

SIM □(1.8 / 3.0V)

PCM

UART*2

□ / ()/GNSS()

LTE